



Z110 Oxygen Analyser

Features

- ◆ Measures from 100% to less than 1ppm
- ◆ Fast response time of less than 5s for 90% change
- ◆ Fully autoranging
- ◆ Programmable alarms and analogue output



The Z110 zirconia oxygen analyser measures oxygen concentrations from percentage levels to a fractions of parts per million (ppm) in clean gases. Packaged on a 19" rack mounting enclosure, it uses a zirconia oxygen sensor to provide accurate measurement with minimal interference from other gases. The unique cell and heater design gives very fast warm-up times, rapid response, and long sensor life. A wide choice of sampling options is provided to produce virtually 'custom-built' systems.

A large multi-digit autoranging LCD is used to display measured concentrations and the user-adjustable parameters in configuration mode.

Two alarm channels each provide one set of volt-free changeover contacts. They can be user-configured to any concentration within the span of the instrument, as well as function (high, low or off) and hysteresis. A choice of two analogue outputs is provided, 0 to 5V or 4 to 20mA, each with several pre-set ranges.

The standard sampling system is a simple needle valve and flowmeter. Standard options provide alternatives to cover a wide variety of applications. Hitech also supply a range of sample conditioning accessories to cater for most sample sources.

TYPICAL APPLICATIONS

- ◆ Air separation plants
- ◆ Nitrogen-purged soldering systems
- ◆ Cylinder gas quality
- ◆ Pharmaceutical and food packaging and storing
- ◆ Purge gas monitoring
- ◆ Glove boxes
- ◆ Workplace air monitoring

SPECIFICATION

Display

Multi-digit LCD, character height 12.7mm

Range

0.1ppm to 100% oxygen, autoranging

Display resolution

From 10% to 100%:	0.1%
From 0.5% to 9.99%:	0.01%
From 500ppm to 4999ppm:	10ppm
From 50ppm to 499ppm:	1ppm
From 5ppm to 49.9ppm:	0.1ppm
From 0ppm to 4.99ppm:	0.01ppm

Accuracy

100% to 100ppm:	±2% of reading or better
99ppm to 10ppm:	±1ppm
0.1ppm to 9/9ppm:	±0.2ppm

Stability

Better than 2% of reading or 0.5ppm/month, whichever is greater

Sample flow

Between 100 and 300ml/min for optimum operation

Speed of response in clean inert atmospheres

% levels: less than 0.5s for 90% change
Levels from 100 to 10ppm: less than 5s for 90% change
Levels less than 100ppm: less than 30s for 90% change
When the cell is stabilised/conditioned at low levels, response to changes at that level is of the order of 3 to 4s

Sample inlet pressure (no pump fitted)

10mbar minimum
8bar maximum

Sample temperature (at analyser)

100°C maximum

Sampling system materials

Materials include: nickel, brass, aluminium, stainless steel, platinum, zirconia, alumina, PTFE and nitrile-rubber

Sample connection (located on back panel of unit)

Captive seal compression fitting suitable for 0.25inch (6mm) outside diameter tube

Analogue outputs

Standard: 0 to 5V
Optional: 4 to 20mA
Each user-programmable for the following spans:
0 to 100%, 0 to 25%, 0 to 5%,
0 to 5000ppm, 0 to 500ppm, 0 to 50ppm, 0 to 5ppm

Alarm outputs

2 alarms: each user-configurable to OFF, HIGH or LOW status
Hysteresis programmable from 0 to 10% of set-point
Volt-free changeover relay contacts rated 48V ac or dc, 0.5A, normally-energised

Ambient temperature


45°C maximum

Power supply

Please specify option required from the following:
110/120V, 50/60Hz at 80VA max
220/240V, 50/60Hz at 80VA max

Mounting

19" Rack-mounting enclosure 3U high and 270mm deep

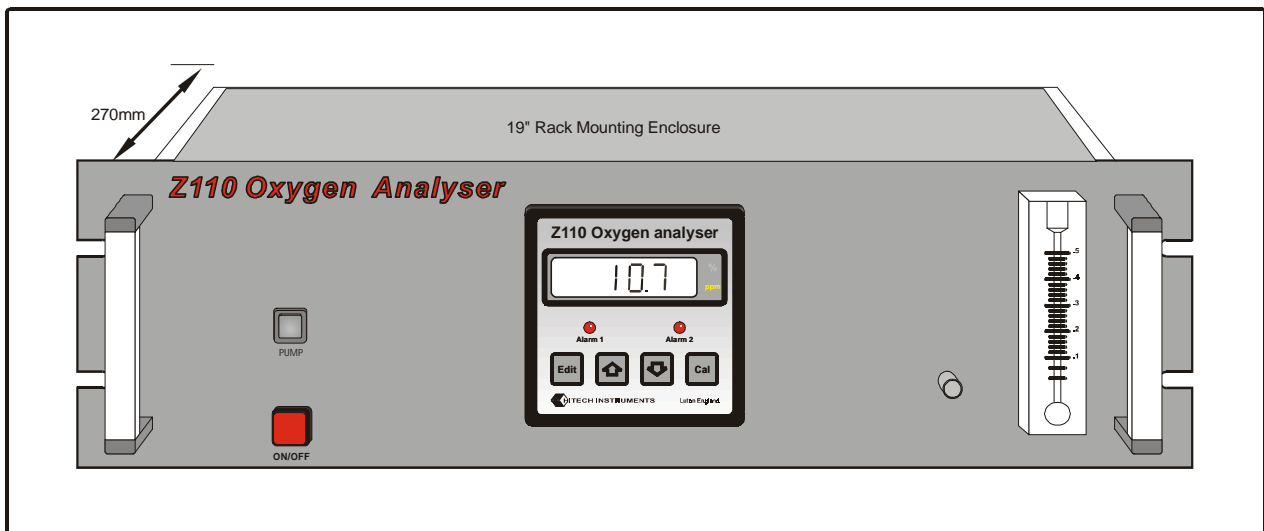

In keeping with a policy of continuous development, Hitech Instruments Limited reserves the right to change any part of this specification without notice

Hitech Instruments Ltd, 20 Titan Court, Laporte Way, Luton, Bedfordshire, England, LU4 8EF

TEL: +44 (0)1582 456900

FAX: +44 (0)1582 400901

e-mail: enq@hitech-inst.co.uk